
# EU100060-4010

ISP2 Case

Shifting loose cargo can slow down your ops and threaten the mission with damaged freight. The ISP² Case from Peli™ virtually eliminates load movement with a unique Inter-Stacking Pattern (ISP). The system is compatible across 64 different case sizes, from 0,018 to 0,576 cubic metres of storage. Equipped with a silicone sponge O-ring and pressure release valves, the ISP² Case is impervious to extreme weather and wet conditions.

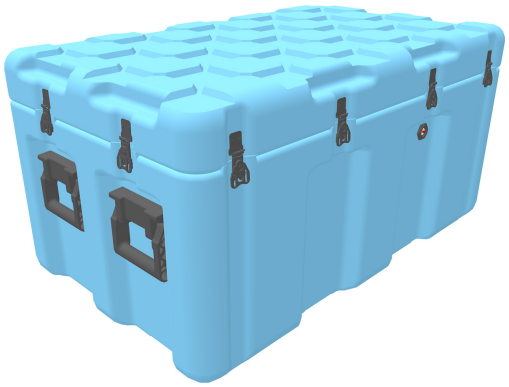

The system is designed to maximize the volume of standard logistics platforms. Whether loading standard pallets, NATO pallets, JMIC containers, 463L pallets or sea containers, the ISP² Case system will make the most efficient use of cargo space.

With its Inter-Stacking Pattern, ISP2 Cases can be cubed out as a solid block. The 10x10cm squared pattern bottom matches with the cube pattern on the case below, literally falling and locking into place.

• Made in Europe
• Inter-stacking pattern to keep loads tigh
• Maximizes the volume of standard logistics platforms
• Moulded-in, tongue-in-groove gasketed parting lines for splash resistance and tight seals, even after impact
• Positive anti-shear locks, which prevent lid separation after impact, and reduce stress on hardware

## DIMENSIONS

| | |
|---|---|
| **Interior (L×W×D)** | 36.02 x 20.28" x 18.50 (91.5 x 51.5 x 47 cm) |
| **Exterior (L×W×D)** | 39.37 x 23.62" x 19.69 (100 x 60 x 50 cm) |
| **Lid Depth** | 3.94" (10 cm) |
| **Bottom Depth** | 15.75" (40 cm) |
| **Total Depth** | 19.69" (50 cm) |
| **Int Volume** | 7.82 ft³ (0.221 m³) |

## MATERIALS

| | |
|---|---|
| **Body** | RotoMolded Polyethylene |
| **Latch** | Steel (Zinc Cobalt-Black-Plated) |
| **O-Ring** | Silicone Sponge |
| **Pins** | Stainless Steel |
| **Pins (Alt)** | Aluminum |
| **Purge Body** | Mechanical PRV - Aluminum Body |

## COLOURS

Black - 032 Fed Std 27040 | Olive Drab - 137 Fed Std 34096 | Gray - 133 Fed Std 26270 | Tan - 250 Fed Std 20372

Red - 130 Fed Std 21105

Blue - 135 Pantone 292U

White - 132 Fed Std 27925

Yellow - 136 Pantone 012U

Green - 138 Fed Std 24052

Orange - 134 Fed Std 12197

Yellow - 131 Fed Std 23538

Maroon - 197 Pantone 202U

Blue - 101 Fed Std 25052

## WEIGHT

| | |
|---|---|
| **Weight Empty** | 39.90 lbs (18.1 kg) |
| **Buoyancy** | 588.41 lbs (266.9 kg) |

## TEMPERATURE

| | |
|---|---|
| **Minimum Temperature** | -22°F (-30 °C) |
| **Maximum Temperature** | 158°F (70 °C) |

**Peli**
c/ Provença, 388, Planta 7 • Barcelona, Spain 08025 • Phone: +34 934 674 999
info@peli.com • www.peli.com

*Document created on 11-03-26*